


STREET LAMP



LAMP



STREET LAMP

WKELAMP-01/24





Material

- Lamppost made of high quality steel through one-shot molding technology
- Hot dipping galvanized and pure polyester powder coating adopted

Features

- Shape of Lamppost: polygon or conical
- Color is optional
- Wind resistance: 160 Km/h

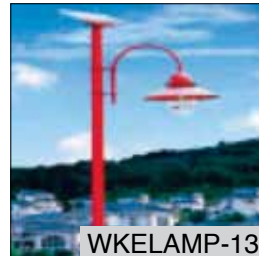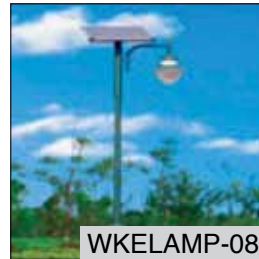

PARAMETERS

CODE	POLE mt.	LIGHT	MODULES	BATTERY	CONTROLLER
WKE LAMP-01	3,5	Led 9W x2	12V 70W	12V 80Ah	12V 10Ah
WKE LAMP-02	3,5	Led 9W x2	12V 70W	12V 80Ah	12V 10Ah
WKE LAMP-03	3,5	Led 9W	12V 35W	12V 38Ah	12V 5Ah
WKE LAMP-04	3,5	Led 9W x2	12V 70W	12V 80Ah	12V 10Ah
WKE LAMP-05	3,5	Led 9W x2	12V 70W	12V 80Ah	12V 10Ah
WKE LAMP-06	3,5	Led 9W	12V 35W	12V 38Ah	12V 5Ah
WKE LAMP-07	3,5	Led 9W x2	12V 70W	12V 80Ah	12V 10Ah
WKE LAMP-08	3,5	Led 9W	12V 35W	12V 38Ah	12V 5Ah
WKE LAMP-09	3,5	Led 9W	12V 35W	12V 38Ah	12V 5Ah
WKE LAMP-10	3,5	Led 9W x2	12V 70W	12V 80Ah	12V 10Ah
WKE LAMP-11	3,5	Led 9W x2	12V 70W	12V 80Ah	12V 10Ah
WKE LAMP-12	3,5	Led 9W	12V 35W	12V 38Ah	12V 5Ah
WKE LAMP-13	3,5	Led 9W	12V 35W	12V 38Ah	12V 5Ah
WKE LAMP-14	3	Bulb 7W x2	12V 60W	12V 65Ah	12V 10Ah
WKE LAMP-15	3	Bulb 7W x2	12V 60W	12V 65Ah	12V 10Ah
WKE LAMP-16	3	Ledtube 9W	12V 35W	12V 38Ah	12V 5Ah
WKE LAMP-17	3	Ledtube 9W	12V 35W	12V 38Ah	12V 5Ah
WKE LAMP-18	5	Led 21W	12V 50Wx2	12V 50Ahx2	24V 5Ah
WKE LAMP-19	6	Led 28W	12V 60Wx2	12V 65Ahx2	24V 5Ah
WKE LAMP-20	7	Led 35W	12V 75Wx2	12V 80Ahx2	24V 5Ah
WKE LAMP-21	8	Led 42W	12V 90Wx2	12V 100Ahx2	24V 5Ah
WKE LAMP-22	9	Led 56W	24V 115Wx2	12V 120Ahx2	24V 10Ah
WKE LAMP-23	10	Led 70W	24V 145Wx2	12V 150Ahx2	24V 10Ah
WKE LAMP-24	11	Led 84W	24V 175Wx2	12V 200Ahx2	24V 10Ah

OTHER CONFIGURATIONS ON REQUEST

ALL IN ONE LAMP

Code: WKELAMPINT-8W




INTEGRATED SOLAR GARDEN LIGHT (8W)




Solar panel	Max power	18V 15W (high efficiency monocrystalline silicon)
	Life time	25 years
Battery	Type	lithium battery
	Life time	5 years
LED Lamp (without sensor)	Max power	12V 8W
	lumen (LM)	800-880lm
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	5-6 hours
Discharge time	full power	12 hours
	half power	24 hours
working Temperature	range	-20°C~+60°C
colour temperature	range	6000k
mounting height	range	3-4m
space between light	range	8-10m
Lamps material of main aluminium alloy		
Certificate	CE / ROHS / IP65	
warranty period	2years	
Packing & Weight	product/packing size	515*320*52mm / 530*390*140MM
	product/packing weight	5.5kg / 6.5kg
	packing box	neutral
	Corton size	560*W570*H410MM

cd/1000 lm Curve

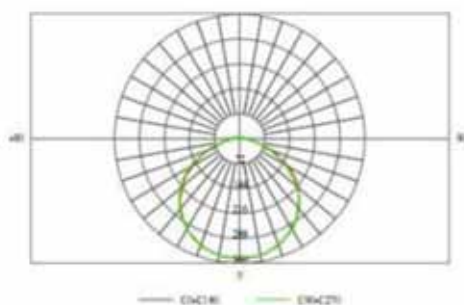

Illumination Cone Curve

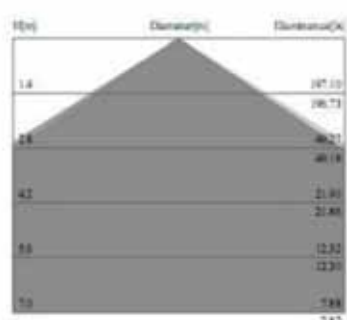

ALL IN ONE LAMP

Code: WKELAMPINT-12W




INTEGRATED SOLAR GARDEN LIGHT (12W)




Solar panel	Max power	18V 18W (high efficiency monocrystalline silicon)
	Life time	25 years
Battery	Type	lithium battery
	Life time	5 years
LED Lamp (without sensor)	Max power	12V 12W
	lumen (LM)	1200-1320lm
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	5-6 hours
Discharge time	saving power	more than 20 hours
working Temperature	range	-20°C~+60°C
colour temperature	range	6000k
mounting height	range	3-4m
space between light	range	8-10m
Lamps material of main aluminium alloy		
Certificate	CE / ROHS / IP65	
warranty period	2years	
Packing & Weight	product/packing size	515*320*52mm / 530*390*140mm
	product/packing weight	5.8kg / 6.8kg
	packing box	neutral
	Corton size	560*W570*H410mm

cd/1000 lm Curve

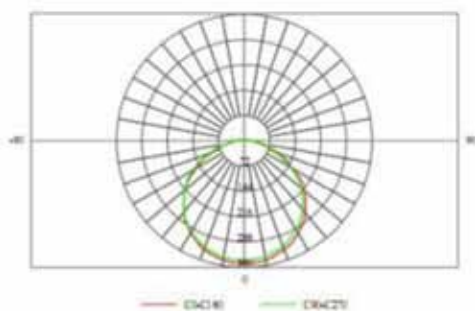

Illumination Cone Curve



ALL IN ONE LAMP

Code: WKELAMPINT-15W




INTEGRATED SOLAR STREET/GARDEN LIGHT (15W)




Solar panel	Max power	18V 25W (high efficiency monocrystalline silicon)
	Life time	25 years
Battery	Type	lithium battery
	Life time	5 years
LED Lamp (with sensor)	Max power	12V 15W
	lumen (LM)	1500-1650lm
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	5-6 hours
Discharge time	saving power	more than 20 hours
working Temperature	range	-20°C~+60°C
colour temperature	range	6000k
mounting height	range	4-5m
space between light	range	10-15m
Lamps material of main aluminium alloy		
Certificate	CE / ROHS / IP65	
warranty period	2years	
Packing & Weight	productsize	650*350*60mm
	product/packing weight	9.0 kg
	packing size	700*420*130mm
	Corton size	700*420*130mm

cd/1000 lm Curve

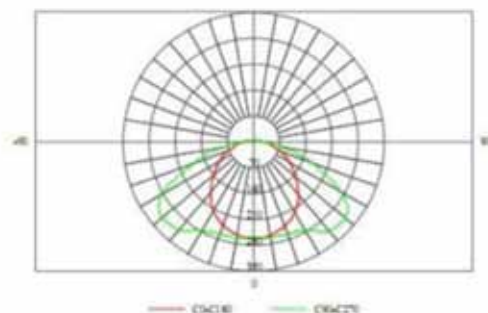

Illumination Cone Curve

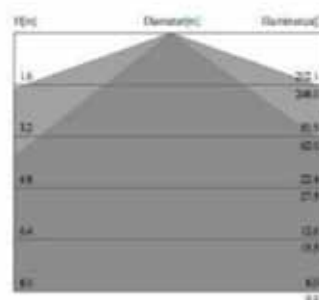

ALL IN ONE LAMP

Code: WKELAMPINT-20W




INTEGRATED SOLAR STREET LIGHT (20W)




Solar panel	Max power	18V 45W (monocrystalline silicon)
	Life time	25 years
Battery	Type	lithium battery
	Life time	5 years
LED Lamp (with sensor)	Max power	12V 20W
	lumen (LM)	2000-2200lm
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	7 hours
Discharge time	full power	more than 10 hours
	saving mode	more than 24 hours
working Temperature	range	-30°C~+60°C
colour temperature	range	6000k
mounting height	range	5-6m
space between light	range	18-20m
Lamps material of main aluminium alloy		
Certificate	CE / ROHS / IP65	
warranty period	2years	
Packing & Weight	productsize	830*330*45mm
	product/packing weight	13 kg
	packing size	950*200*400mm
	Corton size	950*200*400mm

cd/1000 lm Curve

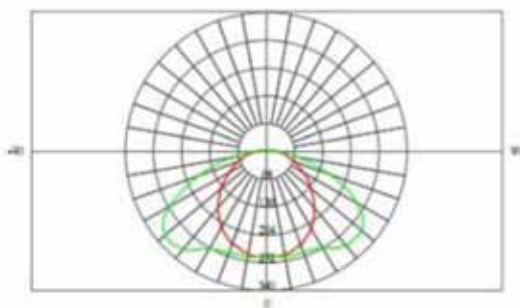

Illumination Cone Curve

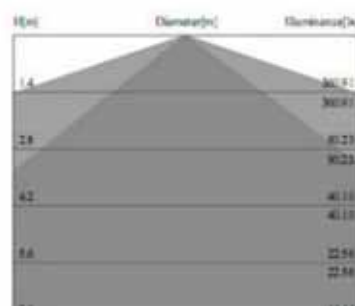

ALL IN ONE LAMP

Code: WKELAMPINT-25W




INTEGRATED SOLAR STREET LIGHT (25W)




Solar panel	Max power	18V 50W (monocrystalline silicon)
	Life time	25 years
Battery	Type	lithium battery
	Life time	5 years
LED Lamp (with sensor)	Max power	12V 25W
	lumen (LM)	2500-2750lm
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	7 hours
Discharge time	full power	more than 10 hours
	saving mode	more than 24 hours
working Temperature	range	-30°C~+60°C
colour temperature	range	6000k
mounting height	range	5-6m
space between light	range	18-20m
Lamps material of main aluminium alloy		
Certificate	CE / ROHS / IP65	
warranty period	2years	
Packing & Weight	product size	1080*330*50mm
	product/packing weight	17 kg
	packing size	1230*400*220mm
	Corton size	1230*400*220mm

cd/1000 lm Curve

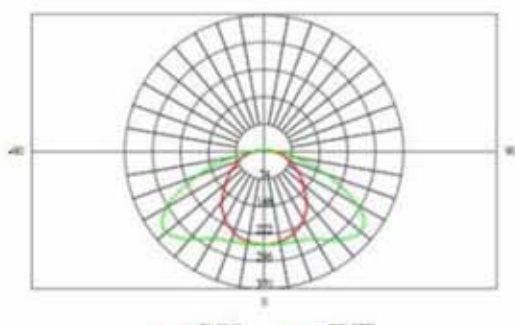

Illumination Cone Curve

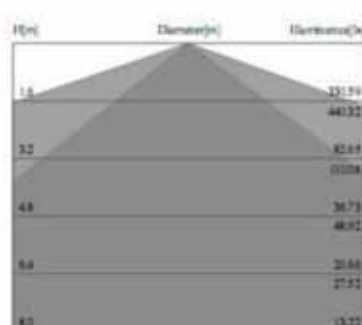

ALL IN ONE LAMP



Code: WKELAMPINT-30W



INTEGRATED SOLAR STREET LIGHT (30W)



Solar panel	Max power	18V 60W (monocrystalline silicon)
	Life time	25 years
Battery	Type	lithium battery
	Life time	5 years
LED Lamp (with sensor)	Max power	12V 30W
	lumen (LM)	3000-3300lm
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	6 hours
Discharge time	full power	more than 10 hours
	saving mode	more than 24 hours
working Temperature	range	-30°C~+60°C
colour temperature	range	6000k
mounting height	range	6-7m
space between light	range	18-20m
Lamps material of main aluminium alloy		
Certificate	CE / ROHS / IP65	
warranty period	2years	
Packing & Weight	product size	1180*325*140mm
	product/packing weight	18 kg
	packing size	1230*400*220mm
	Corton size	1230*400*220mm

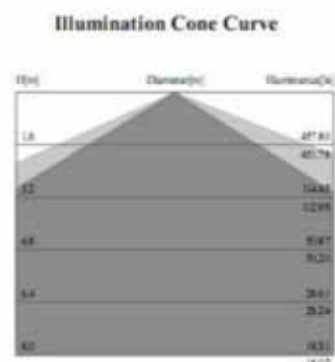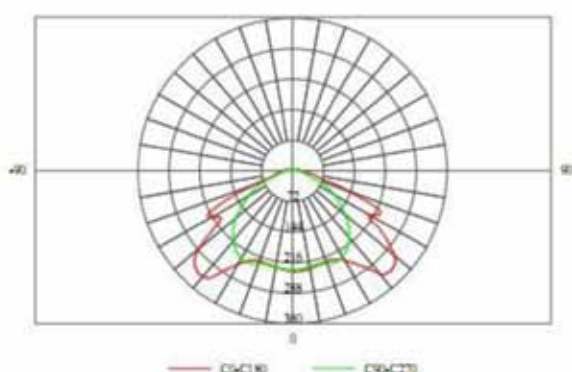

ALL IN ONE LAMP

Code: WKELAMPINT-40W




INTEGRATED SOLAR STREET LIGHT (40W)




Solar panel	Max power	18V 60W (monocrystalline silicon)
	Life time	25 years
Battery	Type	lithium battery
	Life time	5 years
LED Lamp (with sensor)	Max power	40W
	lumen (LM)	4000-4400lm
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	6 hours
Discharge time	full power	more than 10 hours
	saving mode	more than 24 hours
working Temperature	range	-30°C~+60°C
colour temperature	range	6000k
mounting height	range	6-7m
space between light	range	18-20m
Lamps material of main aluminium alloy		
Certificate	CE / ROHS / IP65	
warranty period	2years	
Packing & Weight	product size	1180*325*140mm
	product/packing weight	19 kg
	packing size	1230*400*220mm
	Corton size	1230*400*220mm

cd/1000 lm Curve

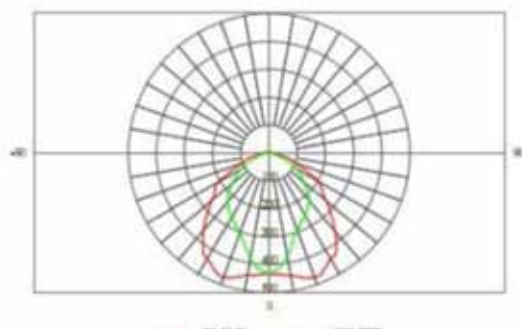

Illumination Cone Curve

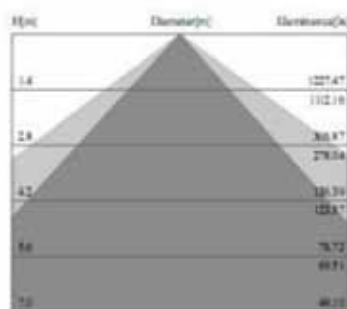

ALL IN ONE LAMP

Code: WKELAMPINT-60W



INTEGRATED SOLAR STREET LIGHT (60W)



Solar panel	Max power	18V 80W (monocrystalline silicon)
	Life time	25 years
Battery	Type	lithium battery
	Life time	5 years
LED Lamp (with sensor)	Max power	60W
	lumen (LM)	6000-6600lm
	Life time	50000hours
	Viewing Angle	120°
Charge time	by sun	6 hours
Discharge time	full power	more than 15 hours
	saving mode	more than 30 hours
working Temperature	range	-30°C~+60°C
colour temperature	range	6000k
mounting height	range	7-9m
space between light	range	25+30m
Lamps material of main aluminium alloy		
Certificate	CE / ROHS / IP65	
warranty period	2years	
Packing & Weight	product size	1200*380*160mm
	product/packing weight	22 kg
	packing size	1230*460*230mm
	Corton size	1230*460*230mm