

# **WKE 185-210**

## **WATT MONOCRYSTALLINE MODULE**



**WKE-72MB185 185Wp    WKE-72MB190 190Wp    WKE-72MB195 195Wp**

**WKE-72MB200 200Wp    WKE-72MB205 205Wp    WKE-72MB210 210Wp**

### **MONOCRYSTALLINE BLACK MODULE**

#### **Characteristics**

- Aesthetically appealing design with black backsheet and frame.
- High module conversion efficiency up to 16.45% through superior manufacturing technology.
- Low degradation and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa.
- Positive power tolerance of 0 ~ +3 %.
- High ammonia and salt mist resistance.

#### **Quality Certificates**

- IEC61215, IEC61730, IEC62716, IEC61701, UL1703, CE, MCS, CEC, Israel Electric, Kemco
- ISO9001:2008: Quality management system
- ISO14001:2004: Environmental management system
- OHSAS18001:2007: Occupational health and safety management system

#### **Special Warranty**

- 12 year limited product warranty.
- Limited power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.
- WKE Bankability
- CHUBB Insurance



### Electrical parameters at STC

| Nominal Power (Pmax)           | 185W  | 190W  | 195W  | 200W  | 205W  | 210W  |
|--------------------------------|-------|-------|-------|-------|-------|-------|
| Open Circuit Voltage (Voc)     | 44.8V | 45.0V | 45.1V | 45.2V | 45.4V | 45.6V |
| Short Circuit Current (Isc)    | 5.45A | 5.54A | 5.63A | 5.72A | 5.81A | 5.90A |
| Voltage at Nominal Power (Vmp) | 36.3V | 36.5V | 36.7V | 36.9V | 37.1V | 37.3V |
| Current at Nominal Power (Imp) | 5.10A | 5.21A | 5.32A | 5.43A | 5.53A | 5.64A |
| Module Efficiency (%)          | 14.49 | 14.88 | 15.27 | 15.67 | 16.06 | 16.45 |

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5


### Electrical parameters at NOCT

| Nominal Power (Pmax)           | 135W  | 139W  | 142W  | 146W  | 150W  | 153W  |
|--------------------------------|-------|-------|-------|-------|-------|-------|
| Open Circuit Voltage (Voc)     | 41.2V | 41.4V | 41.5V | 41.6V | 41.8V | 42.0V |
| Short Circuit Current (Isc)    | 4.41A | 4.49A | 4.56A | 4.63A | 4.71A | 4.78A |
| Voltage at Nominal Power (Vmp) | 33.0V | 33.2V | 33.4V | 33.6V | 33.8V | 33.9V |
| Current at Nominal Power (Imp) | 4.10A | 4.19A | 4.26A | 4.35A | 4.44A | 4.52A |


NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind speed 1 m/s

### Mechanical Characteristics

|                               |                               |
|-------------------------------|-------------------------------|
| Cell type                     | Monocrystalline 125x125mm     |
| Number of cells               | 72 (6x12)                     |
| Module dimension              | 1580x808x35mm                 |
| Weight                        | 15.5kg                        |
| Front cover                   | 3.2mm low-iron tempered glass |
| Frame                         | Anodized aluminum alloy       |
| Junction box                  | IP67, 3 diodes                |
| Cable                         | 4mm <sup>2</sup> , 900mm      |
| Connector                     | MC4 or MC4 compatible         |
| Standard packaging            | 28pcs/pallet                  |
| Module quantity per container | 336pcs/20'GP, 784pcs/40'GP    |

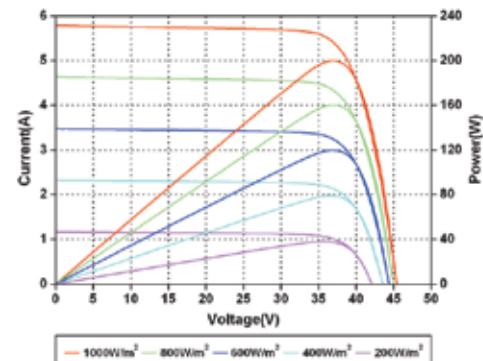

Current-Voltage and Power-Voltage Curves at Different Irradiances

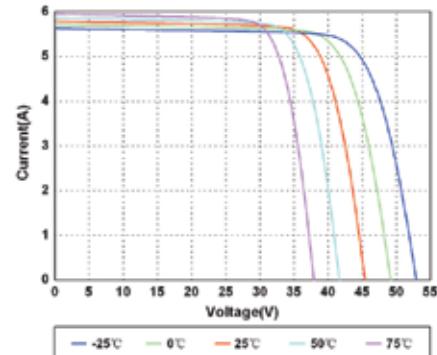

Current-Voltage Curves at Different Temperatures

### Temperature Characteristics

|   |            |
|---|------------|
| Nominal Operating Cell Temperature (NOCT) | 45°C±2°C   |
| Temperature Coefficients of Pmax          | -0.43%/°C  |
| Temperature Coefficients of VOC           | -0.33%/°C  |
| Temperature Coefficients of ISC           | +0.056%/°C |

### Maximum Ratings

|                            |                |
|----------------------------|----------------|
| Operating Temperature      | -40°C to +85°C |
| Maximum System Voltage     | 1000V DC       |
| Maximum Series Fuse Rating | 10A            |